

DLW-LED-028




Die casting heatsink

Injection PC diffuser



Die casting reflector

Anti-glare board

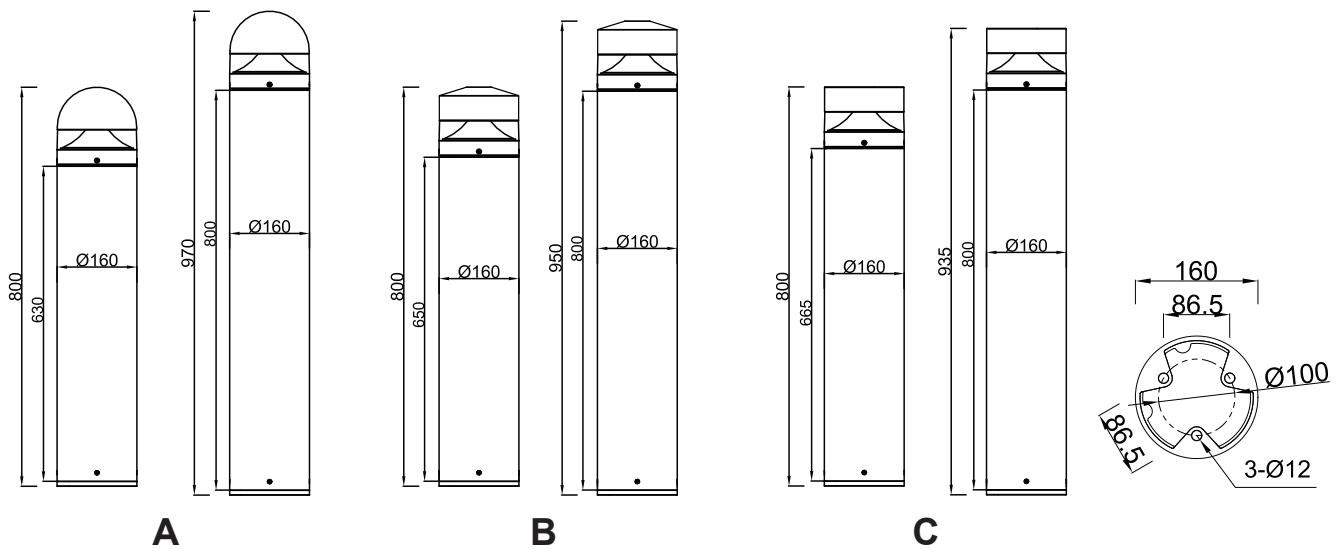

Application:



Walkways



Parks and Gardens



Car parks



Prestigious




Retail



Amenity

Distribution:

INTENSITY DISTRIBUTION DIAGRAM
IN C PLANS

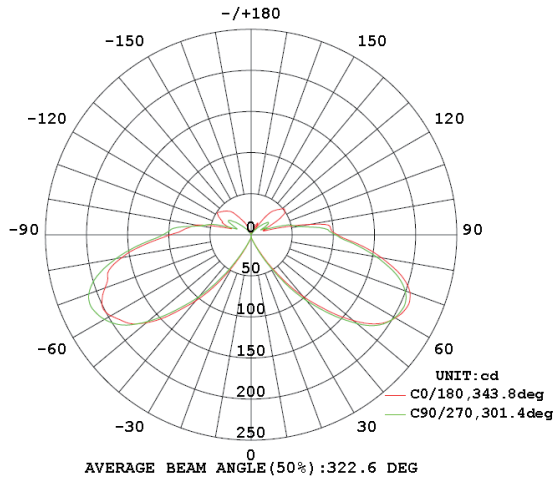

Features:

- Main body is made of Die-casting aluminum alloy with Extruded aluminum alloy.
- The diffuser is a clear anti-UV injection polycarbonate for high efficiency and vandal resistance.
- With anti-glare plate
- Lumileds 2835/3030 led chip and Tridonic driver as regular, Sosen, Meanwell, Osram, driver options.
- Easy access to LED and driver via a removable head.
- 2700-6500K color temperature options.
- Tamper proof fixings for increased vandal resistance.
- Anti-UV electrostatic powder spraying, regular color: Black, Silver, RAL7043, RAL7016
- IP65 rating water and rust proof protection.
- IK08 rating housing protection.
- Warranty is 3-5 years.

Specification:

Item No.	LED	Lumens	Wattage	CCT	CRI
DLW-LED-028-10W	Lumileds 2835	750LM	10W	2700-6500K	Ra≥80
DLW-LED-028-14W	Lumileds 2835	1025LM	14W	2700-6500K	Ra≥80
DLW-LED-028-20W	Lumileds 2835	1391LM	20W	2700-6500K	Ra≥80
DLW-LED-028-24W	Lumileds 2835	1688LM	24W	2700-6500K	Ra≥80
DLW-LED-028-30W	Lumileds 3030	2088LM	30W	2700-6500K	Ra≥80